

PLASTER SEPARATOR / -TRAP

Item No. | 10001

with sealed, 4-chamber clarification system

› no unpleasant odors › no spillage › easy to clean

Transparent container with plastic sheet inlay and snap-shut locking system. Transparency of plaster separator enables visual monitoring of sludge. Plastic bag inlay ensures easy and rapid cleaning.

European-Patent No. 2627426

TECHNICAL DATA

Height, diameter:	320 mm, 340 mm
Discharge height:	245 mm
Discharge connector:	Ø 50 mm
Capacity:	14 l
Inlet connection:	1 1/2", Ø 28 mm
Weight:	2,1 kg



Position inlet in the upper chamber.



For cleaning detach the connection of the drain, unscrew closure cap, remove the remaining water with our drawing and pull out the insert.




Remove drain adapter.




Bind the foil inlay under the outlet opening and remove. Temperature max. 80°C

20004 | Replacement inlay plastic bags, set of 25, for plaster separator / -trap (image not shown)

20202 | Discharge connector for double sink 120 mm – 600 mm / 1 1/2"

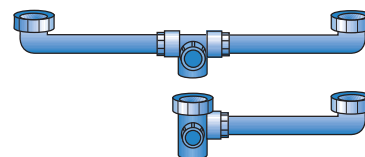

60086 | Discharge connector for double sink 80 mm – 300 mm / 1 1/2"




70073 | Plaster separator supply pipe, straight, 1 1/2"



70074 | Plaster separator supply pipe, 90°, 1 1/2"



90027 | T-connector for double water supply



70115 | Flexible discharge hose, L: 1,000 mm, Ø 50 mm, Conn.: 40/50 mm



70125 | Flexible discharge hose, L: 750 mm, Ø 50 mm, Conn.: 40/50 mm



70124 | Flexible discharge hose, L: 500 mm, Ø 50 mm, Conn.: 40/50 mm

